



GK Mount



GK Mount

Mounting type GK is specifically designed for isolation of heavy machinery with low interfering frequencies. It is widely used under concrete foundations supporting heavy machinery.

The long narrow section enables type GK to be suitable for fitting under a common structural frame supporting different equipments.

Type GK is a heavy duty mounting with excellent flexible characteristics in both vertical and lateral planes. Deflection up to 30 mm is possible making type GK suitable for installations with low disturbing frequencies.

Installation is simple, eliminating traditional methods of attachment to machinery or support structure.

Typical Applications

- Mixers
- Converters
- Paper mills
- Gearboxes
- Industrial fans
- Sound enclosures
- Floating structures

About Trelleborg Industrial AVS

Over 100 years of experience as Metalastik and Novibra, today Trelleborg Industrial AVS make improvements people can physically feel. From smoother travel to quieter, more efficient machines, we make life feel better. With quality, testing and compliance built in, we're in it for the long haul, ensuring your solution still works, over an extended and often arduous life-cycle.


With three state-of-the-art manufacturing plants across the globe, our experience in rubber to metal bonding enhances several industries, including off-highway vehicles, rail and mass transit, marine and energy and general industry.

We offer an end-to-end service, to take you from concept through design, manufacturing and testing to delivery. This reduces the complexity of supply, helping you cut costs, mitigate risk and receive on time, on budget delivery.

Trelleborg IAVS is part of Trelleborg Group, which employs 15,000 people in over 40 countries. Whatever your challenge, whatever your role and wherever you are, we are nearby to offer expert knowledge and quality solutions.

GK Mount

Technical Drawing

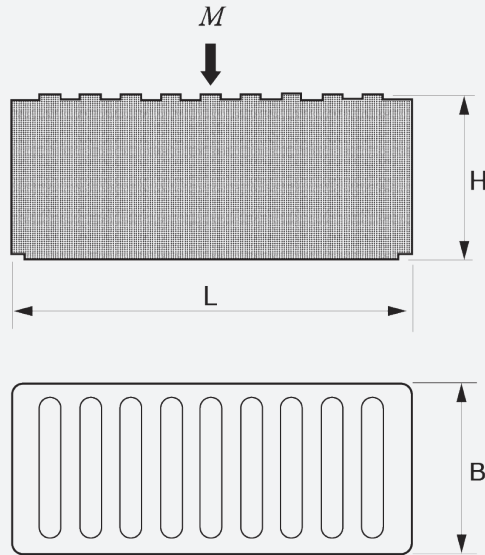

Product Data

TYPE	DRAWING NO.	PART NO.	L	B	H	M-MAX (kg)	WEIGHT (kg)
GK0-40	15-4041	10-00085	195	175	150	5.2	1800
GK0-60	15-4041	10-00101	195	175	150	5.7	3800
GK1-40	15-4042	10-00008	400	175	150	10.7	4000
GK1-60	15-4042	10-00009	400	175	150	11.8	8000



WWW.TRELLEBORG.COM/ANTI-VIBRATION-SOLUTIONS

For further information visit our website or e-mail industrialavs@trelleborg.com

The content in this datasheet was correct at the time of printing, but is subject to change without notice.

